



CEMENTI

NOKER
www.noker.es


NOKER
www.noker.es
email: noker@noker.es



SERIE CEMENTI

Porcelánicos Esmaltados / Glazed Porcelain-Characterísticas Técnicas / Technical Specifications

CARACTERÍSTICAS TÉCNICAS TECHNICAL DATA	NORMA STANDARD	VALORES PREVISTOS INTERNATIONAL STANDARDS (AVE. / ISO 10045-6)	VALOR MEDIO NOKER NOKER AVERAGE VALUE
Water Absorption	ISO 10545-3	Average$\leq 0.5\%$ individual	Conform to standard
Breaking Strength	ISO 10545-4	>1300N	Conform to standard
Modulus of rupture	ISO 10545-4	>35 N/mm ²	Conform to standard
Slip-resistance	DIN 51130 R	From R9 to R13	Conform to standard
ASTM C 1028	ASTM C 1028	≥0.5	Conform to standard
Abrasion resistance	ISO 10545-7	Class PEI	Conform to standard
Length and width		±0.5% MAX	Pass
Side straightness		±0.5% MAX	Pass
Dimension			
Rectangularity	ISO 10545-2	±0.6% MAX	Pass
Centre curvature		±0.5% MAX	Pass
Edge curvature		±0.5% MAX	Pass
Thermal expansion coefficient	ISO 10545-9	Test method available	Resistant
Frost resistance	ISO 10545-12	Required	Resistant
Resistance to household chemical and swimming pool water	ISO 10545-13	Minimum class B	Guaranteed GA
Stain resistance	ISO 10545-14	≥Class 2	Class 5
Determination of the crazing resistance	ISO 10545-12	Required	Resistant

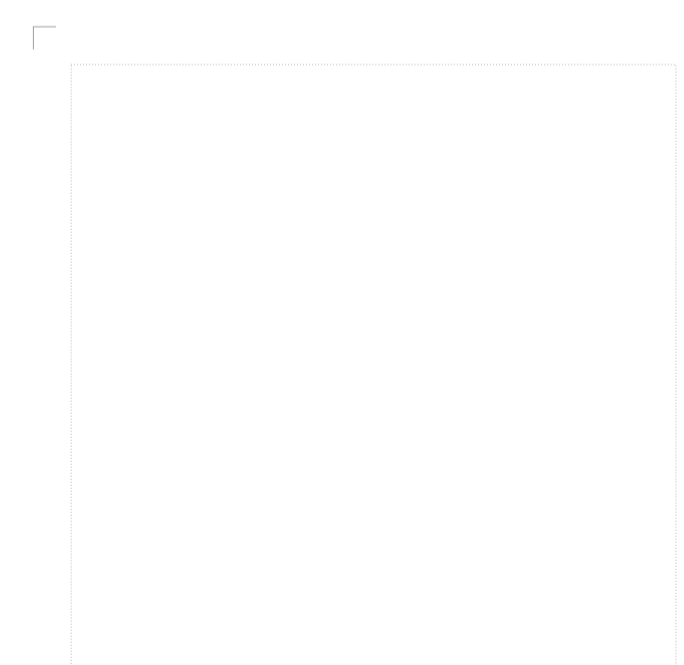


CEMENTI MARFIL

30x60cm / 12"x24" 60x60cm / 24"x24"



CEMENTI ARENA

30x60cm / 12"x24" 60x60cm / 24"x24"

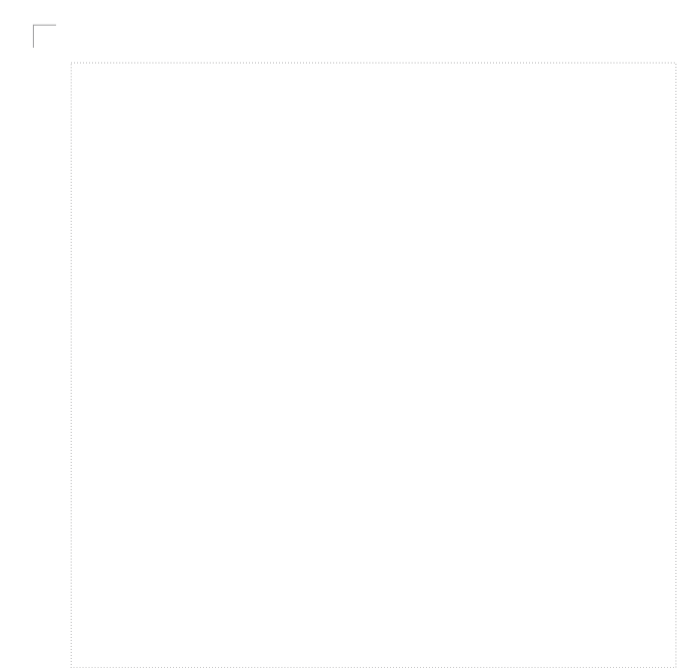

CEMENTI BEIGE

30x60cm / 12"x24" 60x60cm / 24"x24"



CEMENTI NATURAL

30x60cm / 12"x24" 60x60cm / 24"x24"


CEMENTI

NOKER
www.noker.es



CEMENTI GRIS

30x60cm / 12"x24" 60x60cm / 24"x24"

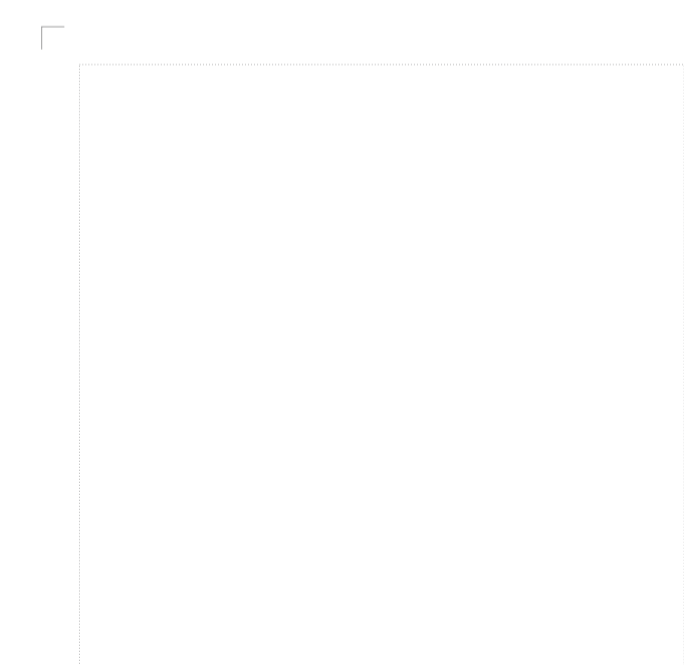


CEMENTI ANTRACITA

30x60cm / 12"x24" 60x60cm / 24"x24"



CEMENTI WENGE

30x60cm / 12"x24" 60x60cm / 24"x24"

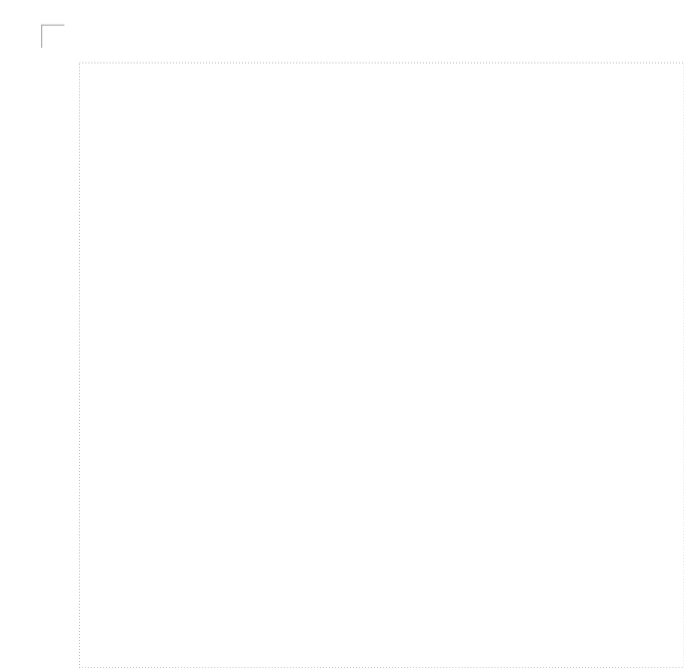

CEMENTI NEGRO

30x60cm / 12"x24" 60x60cm / 24"x24"



CEMENTI MARFIL

30x60cm / 12"x24" 60x60cm / 24"x24"